


# X5R Dielectric, KGM Series

## General Specifications

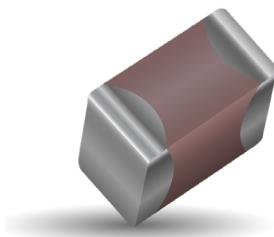

### GENERAL DESCRIPTION

- General Purpose Dielectric for Ceramic Capacitors
- EIA Class II Dielectric
- Temperature variation of capacitance is within  $\pm 15\%$  from  $-55^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Well suited for decoupling and filtering applications
- Available in High Capacitance values (up to  $100\mu\text{F}$ )

### HOW TO ORDER

KGM	03	A	R5	1E	101	M	N
Series	Size	Thickness	Dielectric	Voltage	Capacitance Code Code (in pF)	Capacitance Tolerance	Packaging
General Purpose Tin/Nickel Finish	02 = 01005 03 = 0201 05 = 0402 15 = 0603 21 = 0805 31 = 1206 32 = 1210 43 = 1812	See Cap Chart	R5 = X5R	0G = 4.0V 0J = 6.3V 1A = 10V 1C = 16V 1V = 35V 1E = 25V 1H = 50V	Two Significant Digits + Number of zeroes eg. 106 = $10\mu\text{F}$ 103 = $10\text{nF}$ 470 = $47\text{pF}$	J* = $\pm 5\%$ K = $\pm 10\%$ M = $\pm 20\%$	See Table Below



NOTE: Contact factory for availability of Tolerance Options for Specific Part Numbers.  
Contact factory for non-specified capacitance values.



### PACKAGING CODES

Code	EIA (inch)	IEC(mm)	7" Paper	7" Embossed	13" Paper	13" Embossed
02	01005	0402	H	P	N	
03	0201	0603	H		N	
05	0402	1005	H		N	
15	0603	1608	T		M	
21	0805	2012		U		L
31	1206	3216		U		L
32	1210	3225		U		L
43	1812	4532		V		S

### TYPICAL ELECTRICAL CHARACTERISTICS

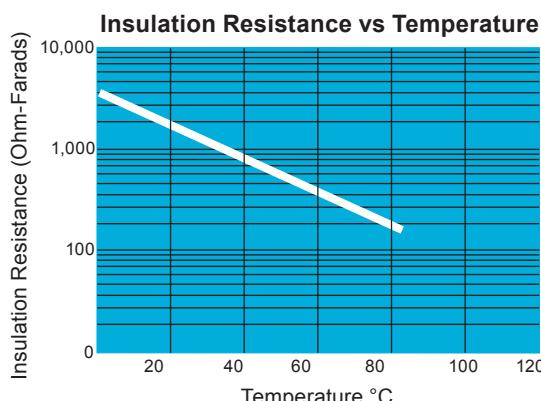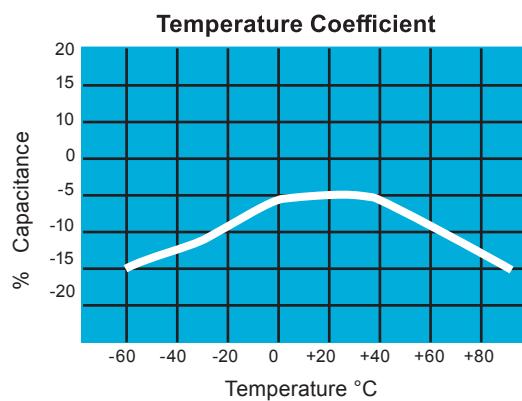

# X5R Dielectric, KGM Series

## Specifications and Test Methods



X5R Specification Limits		X5R Specification Limits	Measuring Conditions (Complies with JIS C5101 / IEC60384)
<b>Operating Temperature Range</b>		-55°C to +85°C	Temperature Cycle Chamber
<b>Capacitance</b>		Within specified tolerance	Measure after heat treatment Capacitance Frequency Volt C≤10μF Frequency : 1kHz±10% Volt : 1.0±0.2Vrms *0.5±0.2Vrms *:KGM02AR50J104, KGM02AR50J474, KGM03CR50J225, KGM03BR50J225 KGM03DR50J475, KGM03CR50G475, KGM05CR50J106
<b>Dissipation Factor / Tanδ</b>		Refer to <a href="https://spicat.kyocera-avx.com">https://spicat.kyocera-avx.com</a> for individual part number specification	C>10μF Frequency : 120Hz±10% Volt : 0.5±0.2Vrms The charge and discharge current of the capacitor must not exceed 50mA.
<b>Insulation Resistance</b>		Refer to <a href="https://spicat.kyocera-avx.com">https://spicat.kyocera-avx.com</a> for individual part number specification	Apply the rated voltage for 1 minute, and measure it in normal temperature and humidity. The charge and discharge current of the capacitor must not exceed 50mA.
<b>Dielectric Strength</b>		No breakdown or visual defects	Charge device with 250% of rated voltage for 1-5 seconds, w/ charge and discharge current limited to 50 mA (max) *: KGM31AR52A225: 200% of rated voltage
<b>Bending Strength</b>		No significant damage with 1mm bending	Glass epoxy PCB: Fulcrum spacing: 90mm, duration time 10 seconds.
<b>Solderability</b>		Solder coverage : 95% min.	Soaking condition Sn-3Ag-0.5Cu 245±5°C 3±0.5 sec.
<b>Resistance to Solder Heat</b>	<b>Appearance</b>	No problem observed	Take the initial value after heat treatment.
	<b>Capacitance Variation</b>	≤ ±7.5%	Soak the sample in 260°C±5°C solder for 10±0.5 seconds and place in normal temperature and humidity, and measure after heat treatment. (Pre-heating conditions)
	<b>Dissipation Factor / Tanδ</b>	Within specification	Order      Temperature      Time 1            80 to 100°C      2 minutes 2            150 to 200°C      2 minutes
	<b>Insulation Resistance</b>	Within specification	The charge and discharge current of the capacitor must not exceed 50mA for IR and withstand voltage measurement.
	<b>Withstanding Voltage / Dielectric Strength</b>	Resist without problem	
<b>Thermal Shock</b>	<b>Appearance</b>	No visual defects	Take the initial value after heat treatment. (Cycle)
	<b>Capacitance Variation</b>	≤ ±7.5%	Room temperature (3 min.) → Lowest operation temperature (30 min.) → Room temperature (3 min.) → Highest operation temperature (30 min.) → After 5 cycles, measure after heat treatment.
	<b>Dissipation Factor</b>	Within specification	The charge and discharge current of the capacitor must not exceed 50mA for IR and withstand voltage measurement.
	<b>Insulation Resistance</b>	Within specification	
	<b>Withstanding Voltage / Dielectric Strength</b>	Resist without problem	
<b>Load Life</b>	<b>Appearance</b>	No visual defects	Take the initial value after heat treatment.
	<b>Capacitance Variation</b>	≤ ±12.5%	After applying *1.5 the rated voltage at the highest operation temperature for 1000+12/-0 hours, and measure the sample after heat treatment in normal temperature and humidity. The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.
	<b>Dissipation Factor / Tanδ</b>	≤ Initial Value x 2.0 (See Above)	*Apply 1.0 times when the rated voltage is 4V or less. Applied voltages for respective products are indicated in the chart below.
	<b>Insulation Resistance</b>	Over 1000MΩ or 50MΩ·μF, whichever is less. *Exceptions Listed Below	The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.
<b>Load Humidity</b>	<b>Appearance</b>	No visual defects	Take the initial value after heat treatment.
	<b>Capacitance Variation</b>	≤ ±12.5%	After applying rated voltage for 500+12/-0 hours in the condition of 40°C±2°C and 90 to 95%RH, and place in normal temperature and humidity, then measure the sample after heat treatment.
	<b>Dissipation Factor / Tanδ</b>	Within specification	The charge and discharge current of the capacitor must not exceed 50mA for IR measurement.
	<b>Insulation Resistance</b>	Over 1000MΩ or 50MΩ·μF, whichever is less. *Exceptions Listed Below	
<b>Appearance</b>		No problem observed	Microscope
<b>Termination Strength</b>		No problem observed	Apply a sideward force of 500g (5N) to a PCB-mounted sample. note : 2N for 0201 size, and 1N for 01005 size.
<b>Vibration</b>	<b>Appearance</b>	No problem observed	Take the initial value after heat treatment. Vibration frequency: 10 to 55 (Hz) Amplitude: 1.5mm
	<b>Capacitance</b>	Within tolerance	Sweeping condition: 10 → 55 → 10Hz/ 1 minute in X, Y and Z directions: 2 hours each, 6 hours in total, and place in normal temperature and humidity, then measure the sample after heat treatment.
	<b>Tanδ</b>	Within tolerance	
<b>Heat treatment</b>		Expose sample in the temperature of 150+0/-10°C for 1 hour and leave the sample in normal temperature and humidity for 24±2 hours.	

Voltage to be applied in the High Temperature Load (Applied voltage is the multiple of the rated voltage)

Rated Voltage		Products
x1.0	6.3V	KGM02AR50J224, KGM02AR50J474, KGM03BR50J225, KGM03CR50J225, KGM03DR50J475, KGM05CR50J106, KGM05BR50J156, KGM05DR50J226, KGM21AR50J476
	10V	KGM02AR51A104, KGM03CR51A225, KGM15CR51A226
	16V	KGM03CR51C105, KGM05AR51C225, KGM05CR51C475, KGM15CR51C226
	25V	KGM05AR51E105, KGM05AR51E225, KGM05CR51E225, KGM05CR51E475, KGM15CR51E475, KGM15CR51E106, KGM21AR51E226
	35V	KGM05AR51V105, KGM15CR51V475, KGM15CR51V106
	100V	KGM31AR52A225
x1.2	6.3V	KGM03BR50J105
x1.3	6.3V	KGM02AR50J153-104, KGM03AR50J474
	10V	KGM03AR51A223-224, KGM05AR51A105-225
	16V	KGM05AR51C105

<Load Life / Load Humidity> Insulation Resistance : Over 10MΩ·μF

X5R / R5	03	KGM03BR51A105, KGM03CR51C224, KGM03CR51E224
	05	KGM05BR51A475, KGM05CR51A106, KGM05CR51V225




The Important Information/Disclaimer is incorporated in the catalog where these specifications came from or available online at [www.kyocera-avx.com/disclaimer/](http://www.kyocera-avx.com/disclaimer/) by reference and should be reviewed in full before placing any order.

# X5R Dielectric, KGM Series

## Capacitance Range

Case Size	01005				0201				0402								0603								0805								
Soldering	Reflow Only				Reflow Only				Reflow/Wave								Reflow/Wave								Reflow/Wave								
Packaging	Paper/Embossed				All Paper				All Paper								All Paper								All Embossed								
(L) Length (in.)	mm 0.40 ± 0.02 (0.016 ± 0.008)	mm 0.60 ± 0.09 (0.024 ± 0.004)	mm 1.00 ± 0.20 (0.040 ± 0.008)	mm 1.60 ± 0.20 (0.063 ± 0.008)	mm 2.01 ± 0.20 (0.079 ± 0.008)																												
(W) Width (in.)	mm 0.20 ± 0.02 (0.008 ± 0.008)	mm 0.30 ± 0.09 (0.011 ± 0.004)	mm 0.50 ± 0.20 (0.020 ± 0.008)	mm 0.80 ± 0.20 (0.031 ± 0.008)	mm 1.25 ± 0.20 (0.049 ± 0.008)																												
(t) Terminal (in.)	mm 0.10 ± 0.04 (0.004 ± 0.0016)	mm 0.15 ± 0.05 (0.006 ± 0.002)	mm 0.25 ± 0.10 (0.010 ± 0.004)	mm 0.35 ± 0.15 (0.014 ± 0.006)	mm 0.50 ± 0.25 (0.020 ± 0.010)																												
Voltage:	6.3	10	16	4	6.3	10	16	25	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50				
Cap (pF)	100	101	A	A			A																										
	150	151	A	A			A																										
	220	221	A	A			A											A															
	330	331	A	A			A											A															
	470	471	A	A			A											A															
	680	681	A	A			A											A															
	1000	102	A	A			A	A										A															
	1500	152	A	A	A		A	A										A															
	2200	222	A	A	A		A	A	A									A															
	3300	332	A	A	A		A	A	A									A															
	4700	472	A	A	A		A	A	A									A															
	6800	682	A	A	A		A	A	A									A															
Cap (μF)	0.010	103	A	A	A		A	A	A									A															
	0.015	153	A															A															
	0.022	223	A				A	A	A	A								A													K		
	0.033	333	A				A											A													K		
	0.047	473	A				A	A	A	A								A												K			
	0.068	683	A				A											A												K			
	0.10	104	A	A			A	A	A	B								A											K	K	K		
	0.15	154					A	A	A	C								A	B	B	B	B	B	B	B	B	B	B	K	K			
	0.22	224	A				A	A	A	C								A	B	B	B	B	B	B	B	B	B	B	B	K			
	0.33	334																B	B	B	B	B	B	B	B	B	B	B	B	A			
	0.47	474	A				A	A										H	B	B	B	B	B	B	B	B	B	B	B	A	A		
	0.68	684																B	B	B	B	B	B	B	B	B	B	B	B	A	A		
	1	105					B	B	C	C								B	B	B	B	B	B	B	B	B	B	B	B	A	A	A	
	2.2	225					C	B/C	C									B	B	B	B	B	C	C	C	C	C	C	C	A	A	A	
	4.7	475					C	D										B	B	B	B	B	C							A	A	A	A
	10	106																C	C	C	C	C	C							A	A	A	A
	15	156																															
	22	226																															
	47	476																															
	100	107																															
Voltage:	6.3	10	16	4	6.3	10	16	25	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50				
Case Size	01005				0201				0402								0603								0805								



Case Size	01005 (KGM 02)				0201 (KGM03)				0402 (KGM05)								0603 (KGM15)				0805 (KGM21)				
Thickness Letter	A	A	B	C	D	A	F	B	C	H	D	A	B	C	D	K	A								
Max Thickness (mm)	0.22	0.33	0.35	0.39	0.55	0.56	0.6	0.65	0.70	0.75	0.8	0.90	0.95	1	1.02	1.40	1.45								
Carrier Tape	PAPER					PAPER				PAPER							PAPER								EMB
Packaging Code 7"reel	H	H	H	H	H	H	H	H	H	H	H	T	T	T	T	U	U								
Packaging Code 13"reel	P	N	N	N	N	N	N	N	N	N	N	M	M	M	M	L	L								
	PAPER																EMBOSSED (EMB)								

# X5R Dielectric, KGM Series

## Capacitance Range

### PREFERRED SIZES ARE SHADED

Case Size	1206							1210							1812							
Soldering	Reflow/Wave							Reflow Only							Reflow Only							
Packaging	All Embossed							All Embossed							All Embossed							
(L) Length mm (in.)																						
3.20 ± 0.40 (0.126 ± 0.016)																						
(W) Width mm (in.)																						
1.60 ± 0.30 (0.063 ± 0.012)																						
(t) Terminal mm (in.)																						
0.50 ± 0.25 (0.020 ± 0.010)																						
Voltage:	4	6.3	10	16	25	35	50	100	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Cap 100 101																						
(pF) 150 151																						
220 221																						
330 331																						
470 471																						
680 681																						
1000 102																						
1500 152																						
2200 222																						
3300 332																						
3900 392																						
4700 472																						
5600 562																						
6800 682																						
Cap 0.010 103																						
(μF) 0.012 123																						
0.015 153																						
0.018 183																						
0.022 223																						
0.027 273																						
0.033 333																						
0.039 393																						
0.047 473																						
0.068 683																						
0.082 823																						
0.10 104																						
0.12 124																						
0.15 154																						
0.22 224																						
0.33 334																						
0.47 474	M	M	M	M	M	M	M									C	C					
0.68 684																						
1 105	H	H	H	H	H	H	H		E	E	E	E	E	E	E							
2.2 225	H	H	H	H	H	H	H	A	L	L	L	L	L	L	L							
4.7 475	H	H	H	H	A	H	A		J	J	J	J	J	A	A							
10 106	H	H	H	H	A	H	H		J	J	J	J	J	A	A							J
22 226	H	H	H	A	H				A	A	A	L	A			J	J	J				
47 476	H	H	H	H					L	L	L	L	L									
100 107	H	H							L	L		L										
Voltage:	4	6.3	10	16	25	35	50	100	4	6.3	10	16	25	35	50	4	6.3	10	16	25	35	50
Case Size	1206							1210							1812							

Case Size	1206 (KGM 31)				1210 (KGM 32)				1812 (KGM 43)												
Thickness Letter	M	A	H	C	E	J	A	L	J												
Max Thickness (mm)	1.25	1.8	1.9	1.27	1.45	2.21	2.7	2.80	2.80												
Carrier Tape	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB	EMB												
Packaging Code 7" reel	U	U	U	U	U	U	U	U	U	V											
Packaging Code 13" reel	L	L	L	L	L	L	L	L	L	S											
EMBOSSING (EMB)																					