




**Part Number :** [901301112](#)  
**Product Description :** C-Grid III Header, Dual Row,  
Vertical, Shrouded, Fully Loaded, 12 Circuits, Black,  
3µm Tin (Sn) over Nickel (Ni)  
**Series Number :** 90130  
**Status :** Active  
**Product Category :** PCB Headers and Receptacles

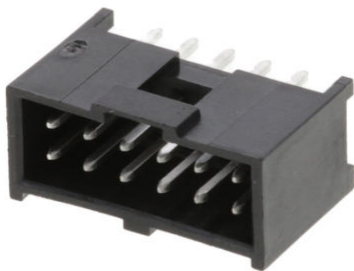

## Documents & Resources

### Drawings

[901301112\\_sd.pdf](#)  
[PK-91814-005-001.pdf](#)

### 3D Models and Design Files


[901301112\\_stp.zip](#)

### Specifications

[901190001-AS-000.pdf](#)  
[PK-90130-001-001.pdf](#)  
[PS-99020-0001-001.pdf](#)

## Product Environment Compliance

### Compliance

GADSL/IMDS	Compliant with Exemption 44; 33
China RoHS	 per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2024)7663-DC (21 Jan 2025)
EU RoHS	Compliant per EU 2015/863

### Compliance Statements

- EU RoHS

- REACH SVHC
- Low-Halogen

#### Industry Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

#### Substances of Interest

- PFAS

#### EU RoHS Certificate of Compliance

#### Additional Product Compliance Information

---

## Part Details

### General

Status	Active
Category	PCB Headers and Receptacles
Series	90130
Description	C-Grid III Header, Dual Row, Vertical, Shrouded, Fully Loaded, 12 Circuits, Black, 3µm Tin (Sn) over Nickel (Ni)
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Name	C-Grid III
UPC	800753700208

### Agency

CSA	LR19980
UL	E29179

### Electrical

Current - Maximum per Contact	3.0A
Voltage - Maximum	350V AC/DC

### Physical

Breakaway	No
-----------	----

Circuits (Loaded)	12
Circuits (maximum)	12
Color - Resin	Black
Durability (mating cycles max)	30
First Mate / Last Break	No
Flammability	94V-0
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Material - Metal	Brass
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester
Net Weight	1.500/g
Number of Rows	2
Orientation	Vertical
Packaging Type	Tray
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
PC Tail Length	2.90mm
Pitch - Mating Interface	2.54mm
Pitch - Termination Interface	2.54mm
Plating min - Mating	3.048μm
Plating min - Termination	3.048μm
Polarized to Mating Part	Yes
Polarized to PCB	No
Shrouded	Closed Ends
Stackable	No
Temperature Range - Operating	-55° to +125°C
Termination Interface Style	Through Hole

### Solder Process Data

Max-Duration	3
--------------	---

Lead-Free Process Capability	WAVE
Max-Cycle	1
Max-Temp	235

---

**Mates With / Use With**

**Mates with Part(s)**

Description	Part Number
C-Grid III Dual Row Crimp Housings	<u>90142</u>
C-Grid III Modular Dual Row Crimp Housings	<u>90143</u>